

CRANE / LUFFING


CTL260-18 HD23

TEREX COMEDIL

Ideally suited to jobs in tight inner-city sites, the Terex CTL 260 electric luffing jib tower crane is one of the world's most technologically advanced luffers. With a maximum jib length of 55m it can be luffed almost vertically, and needs very little room to rotate. It is ideal for tight sites that are very close to neighbouring properties as they make very little noise due to their electric motors.

SPECIFICATIONS

Max jib length	55 m
Capacity at max length	2.9 t
Max radius	55 m
Max capacity	18 t
Engine type	Electric

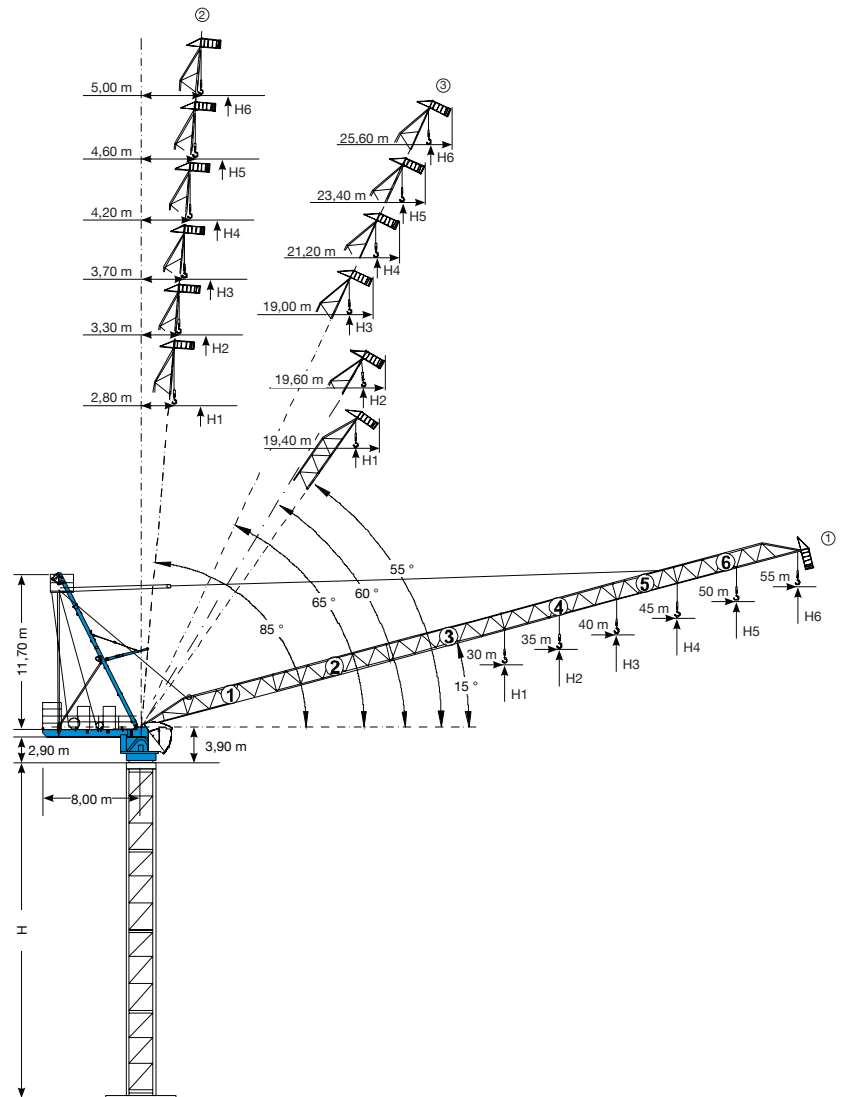

WEIGHT MAX	RADIUS MAX	15 m	20 m	25 m	30 m	35 m	40 m	45 m	50 m	55 m
9.00 t	28.40 m	9.00 t	9.00 t	9.00 t	8.36 t	6.71 t	5.47 t	4.50 t	3.73 t	3.10 t
13.50 t	20.40 m	13.50 t	13.50 t	10.45 t	8.14 t	6.50 t	5.26 t	4.30 t	3.53 t	2.90 t
9.00 t	31.90 m	9.00 t	9.00 t	9.00 t	9.00 t	7.92 t	6.54 t	5.46 t	4.60 t	
13.50 t	22.60 m	13.50 t	13.50 t	11.91 t	9.34 t	7.50 t	6.13 t	5.05 t	4.20 t	*
18.00 t	17.90 m	18.00 t	15.76 t	11.91 t	9.34 t	7.50 t	6.13 t	5.05 t	4.20 t	
9.00 t	32.80 m	9.00 t	9.00 t	9.00 t	9.00 t	8.28 t	6.88 t	5.80 t		
13.50 t	23.20 m	13.50 t	13.50 t	12.30 t	9.71 t	7.86 t	6.48 t	5.40 t	*	
18.00 t	18.20 m	18.00 t	16.19 t	12.30 t	9.71 t	7.86 t	6.48 t	5.40 t		
9.00 t	33.70 m	9.00 t	9.00 t	9.00 t	9.00 t	8.60 t	7.20 t			
13.50 t	23.70 m	13.50 t	13.50 t	12.64 t	10.04 t	8.19 t	6.80 t	*		
18.00 t	18.50 m	18.00 t	16.54 t	12.64 t	10.04 t	8.19 t	6.80 t			
9.00 t	34.00 m	9.00 t	9.00 t	9.00 t	9.00 t	8.70 t				
13.50 t	23.80 m	13.50 t	13.50 t	12.70 t	10.13 t	8.30 t	*			
18.00 t	18.60 m	18.00 t	16.55 t	12.70 t	10.13 t	8.30 t				
9.00 t	30.00 m	9.00 t	9.00 t	9.00 t	9.00 t					
13.50 t	23.90 m	13.50 t	13.50 t	12.77 t	10.20 t	*				
18.00 t	18.50 m	18.00 t	16.63 t	12.77 t	10.20 t					